



2006 Honda Shadow Spirit 750 Battery Replacement

This repair guide shows how to replace the battery in a 2006 Honda Shadow Spirit 750.

Written By: Dazarene Cascio



INTRODUCTION

This guide will show how to replace a dead or dying battery in a Honda Shadow Spirit motorbike. All tools should be included in the motorbike in the tool box.

NOTE: The directions in the guide refer to the view from the back of the motorbike.

Left = The side opposite the tail pipe

Right = The side with the tail pipe



TOOLS:

- [6mm Allen Wrench](#) (1)
- [Phillips #2 Screwdriver](#) (1)



PARTS:


- [YTZ14S Battery](#) (1)
-

Step 1 — Remove outer casing




- Remove the plastic covering, located on the left side of the bike, by pulling the piece straight off the bike.

Step 2 — Open toolbox

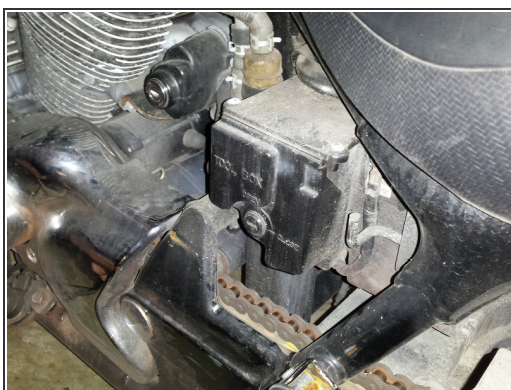

- The tool box is located under the panel.
- Using the key to the motorbike, unlock the tool box.
- Remove the plastic bag inside holding the tools needed for basic maintenance for the motorbike.

Step 3 — Unscrew the seat

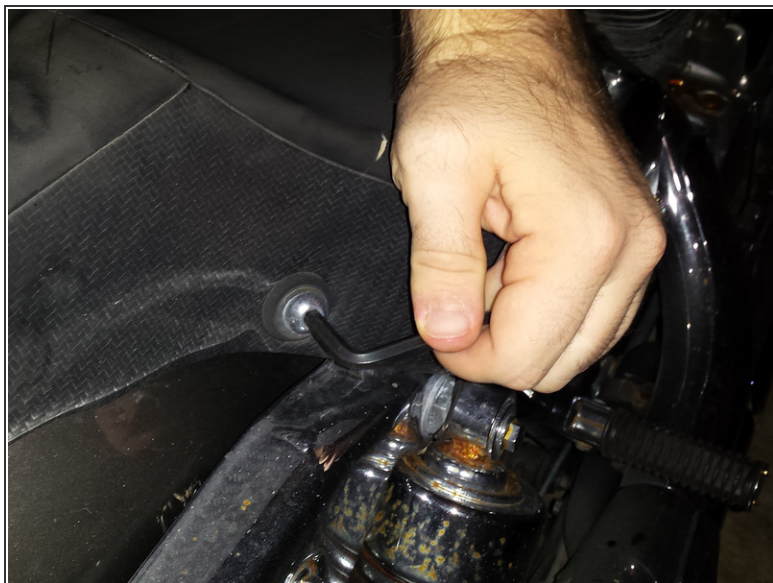

- Using the allen wrench, remove the screws on both sides of the bike seat.

Step 4 — Remove the seat



- Pull the rear of the seat upwards.
- Pull the seat backwards to remove it from the bike.

Step 5 — Remove plastic covering



- Using the screwdriver, remove the screw holding the plastic cover.

Step 6 — Remove the fusebox




- Pull the cover off the battery and remove the fuse box from the cover.
- Place the fuse box over to the side right of the bike. Do not disconnect the wires.

Step 7 — Detach the ground wire



- Using the screwdriver, remove the ground wire (negative (-) cable) from the battery.
- Place the wire over the left side of the bike.

Step 8 — Detach the power cable

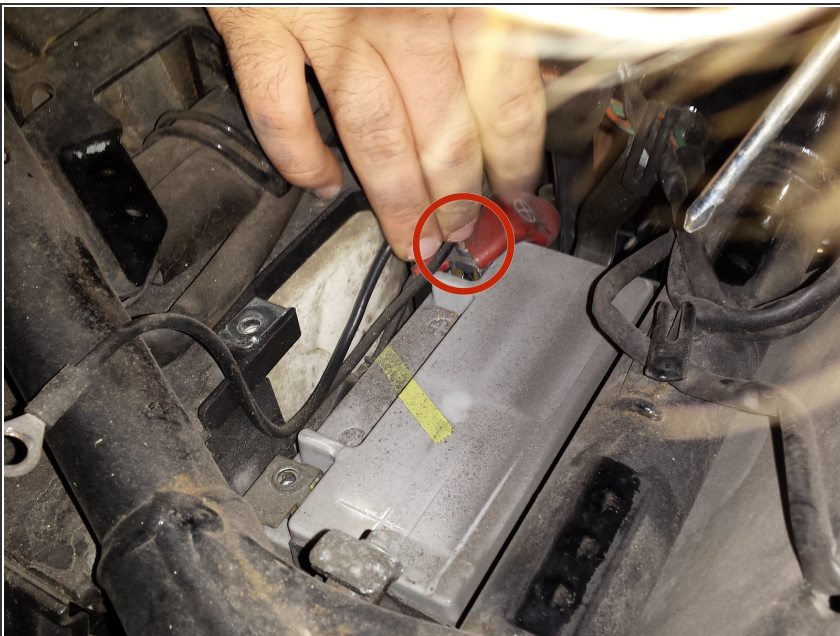

- Also using the screwdriver, remove the positive (+) cable from the battery.
 - Place the wire over the right side of the bike.
- ⚠ Do not let the red(+) and black(-) wires touch

Step 9 — Remove the battery



- Remove the battery from the bike by pulling upwards.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-06-21 06:49:55 PM.